


## 50.2100C-N | Single Lever 2- Way Concealed Diverter

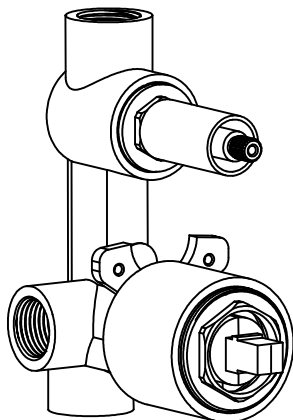

### SPECIFICATIONS:

- Solid Brass construction
- 16.5 LPM Flow Rate at 3 BAR
- Diverter Controls Water Flow between 2 outlets
- Ceramic disc cartridge allows both volume and temperature control

### FINISHES :

- Chrome (CR), French Gold (FG), Black Bronze (BB)

### STANDARDS:

- ASME A112.18.1 / CSA B125.1

Legislation Compliance



Belgian Mirror Finish



### Technical Diagram

